


# Simplex rollenketting

In speciale uitvoering

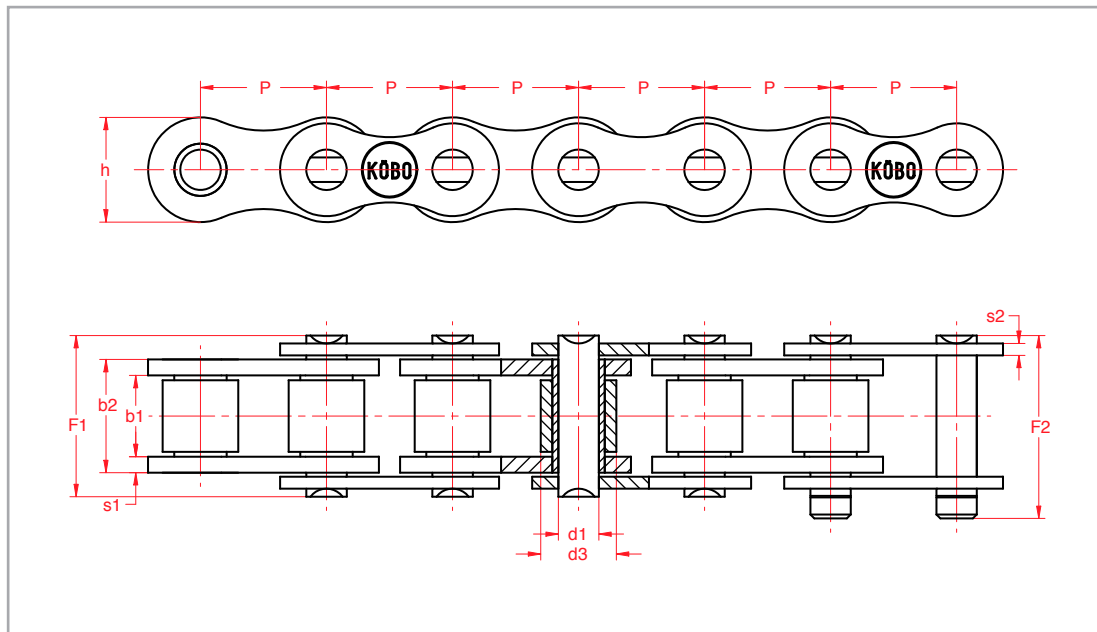

Nr.	Art.Nr.	inch	p mm	b <sub>1</sub> mm min.	b <sub>2</sub> mm max.	d <sub>1</sub> mm h <sub>9</sub>	d <sub>3</sub> mm max.	F <sub>1</sub> mm	F <sub>2</sub> mm	h mm max.	s <sub>1</sub> mm	s <sub>2</sub> mm	f cm <sup>2</sup>	F <sub>B</sub> N min.	q kg/m
RVS ketting*															
05B-1	11175000	-	8	3,00	4,77	2,31	5,00	8,0	9,0	7,1	0,8	0,8	0,11	4000	0,18
06B-1	11205000	3/8"	9,525	5,72	8,53	3,28	6,35	12,9	14,0	8,3	1,25	1,25	0,28	7000	0,41
08B-1	11265000	1/2"x1/8"	12,7	7,75	11,30	4,45	8,51	17,0	18,7	11,8	1,65	1,65	0,50	12000	0,70
10B-1	11335000	5/8"	15,875	9,65	13,28	5,08	10,16	19,1	21,1	14,7	1,70	1,70	0,67	14500	0,91
12B-1	11395000	1/2"	19,05	11,68	15,62	5,72	12,07	22,2	24,5	16,1	1,85	1,85	0,89	18500	1,18
16B-1	11455000	1"	25,4	17,02	23,60	8,28	15,88	36,0	39,4	23,4	3,25	3,25	1,95	40000	2,80
20B-1		1 1/4"	31,75	19,56	29,00	10,19	19,05	43,2	49,3	26,4	4,50	3,50	2,95	59000	3,73

\* Duplex, triplex en 24B op aanvraag.

Verzinkte ketting

06B-1	11204000	3/8"	9,525	5,72	8,53	3,28	6,35	13,4	15,1	8,2	1,3	1,3	0,28	9300	0,41
08B-1	11264000	1/2"x1/8"	12,7	7,75	11,30	4,45	8,51	17,0	19,3	11,8	1,6	1,6	0,50	18200	0,70
10B-1	11334000	5/8"	15,875	9,65	13,28	5,08	10,16	19,1	21,5	14,7	1,6	1,6	0,67	22500	0,95
12B-1	11394000	1/2"	19,05	11,68	15,62	5,72	12,06	22,3	25,1	16,1	1,8	1,8	0,89	30500	1,25
16B-1	11454000	1"	25,4	17,02	25,40	8,28	15,88	35,8	40,1	21,0	4,0	3,0	2,10	71500	2,70