


# Duplex rollenketting

DIN 8187

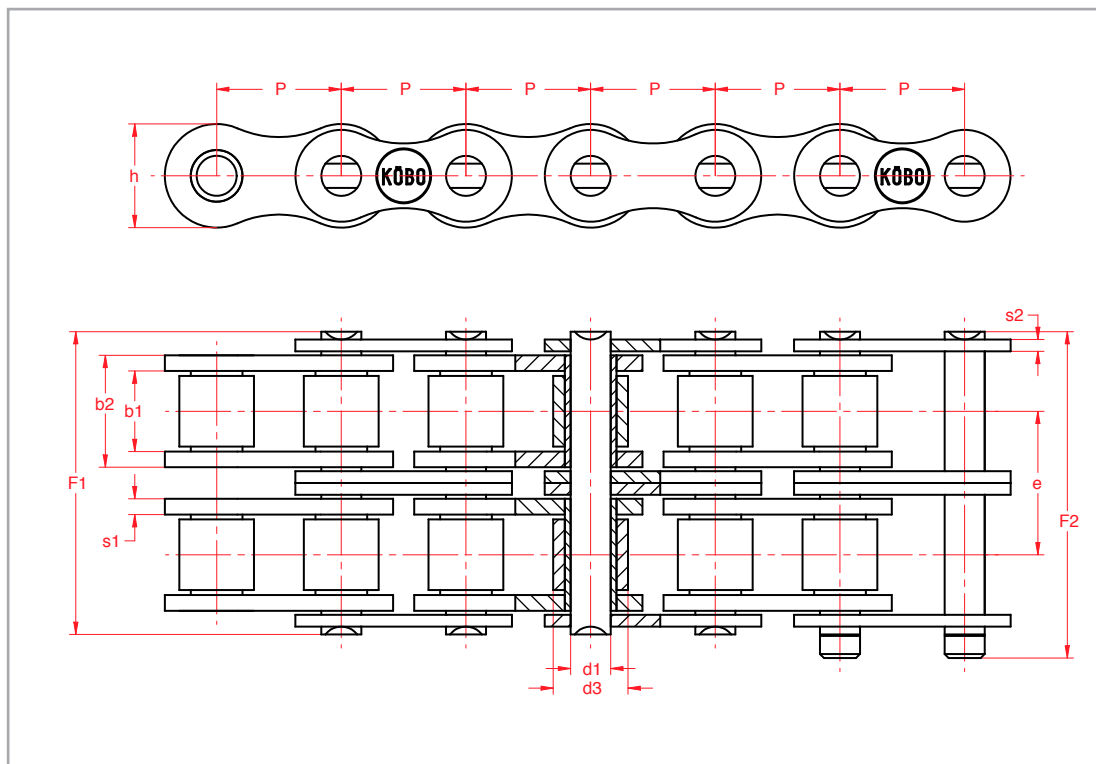

Nr.	Art.Nr.	inch	p mm	b <sub>1</sub> mm min.	b <sub>2</sub> mm max.	d <sub>1</sub> mm h <sub>g</sub>	d <sub>3</sub> mm max.	F <sub>1</sub> mm	F <sub>2</sub> mm	h mm max.	s <sub>1</sub> mm	s <sub>2</sub> mm	e mm	f cm <sup>2</sup>	F <sub>B</sub> N min.	q kg/m
05B-2	12171000	-	8	3,00	4,77	2,31	5,00	13,9	14,6	7,1	0,75	0,75	5,64	0,22	9500	0,36
06B-2	12201000	¾"	9,525	5,72	8,53	3,28	6,35	22,5	24,6	8,2	1,3	1,3	10,24	0,56	18100	0,78
08B-2	12261000	½"x¾"	12,7	7,75	11,30	4,45	8,51	31,0	32,7	11,8	1,6	1,6	13,92	1,01	35400	1,35
10B-2	12331000	¾"	15,875	9,65	13,28	5,08	10,16	35,9	37,3	14,7	1,6	1,6	16,59	1,34	43900	1,85
12B-2	12391000	½"	19,05	11,68	15,62	5,72	12,07	41,9	43,5	16,1	1,8	1,8	19,46	1,79	56500	2,50
16B-2	12451000	1"	25,4	17,02	25,40	8,28	15,88	67,7	72,1	21,0	4,0	3,0	31,88	4,21	139500	5,40
20B-2	12561000	1¼"	31,75	19,56	29,01	10,19	19,05	77,1	83,1	26,4	4,5	3,5	36,45	5,91	195000	7,20
24B-2	12701000	1½"	38,1	25,40	37,90	14,63	25,40	101,8	109,1	33,4	5,5	5,0	48,36	11,09	351000	13,5
28B-2	12791000	1¾"	44,45	30,99	46,50	15,90	27,94	124,9	131,7	37,0	7,0	6,0	59,56	14,79	443000	16,6
32B-2	12861000	2"	50,8	30,99	46,50	17,81	29,21	123,1	132,1	42,2	7,0	6,0	58,55	16,21	526000	21,0
40B-2	12901000	2½"	63,5	38,10	55,70	22,89	39,37	151,3	160,1	52,9	8,0	8,0	72,29	25,50	700000	32,0
48B-2	12971000	3"	76,2	45,72	70,50	29,24	48,26	191,6	199,0	63,8	12,0	10,0	91,21	41,23	1150000	50,0
56B-2	12921000	3½"	88,9	53,34	81,30	34,32	53,98	224,0	274,0	77,8	13,0	12,0	106,60	55,80	1640000	70,0
64B-2	12951000	4"	101,6	60,96	92,00	39,40	63,50	250,0	262,0	90,1	14,0	13,0	119,89	72,50	2170000	120
72B-2	12981000	4½"	114,3	68,58	103,80	44,50	72,39	285,0	293,5	103,6	17,0	15,0	136,27	92,40	2660000	160

RVS ketting met rechterplaat duplex

16B-2	LH12455600	1"	25,4	17,02	25,40	8,28	15,88	67,7	72,1	21,0	4,0	3,0	31,88	4,21	97650	5,40
-------	------------	----	------	-------	-------	------	-------	------	------	------	-----	-----	-------	------	-------	------