


# Triplex rollerketting

DIN 8187

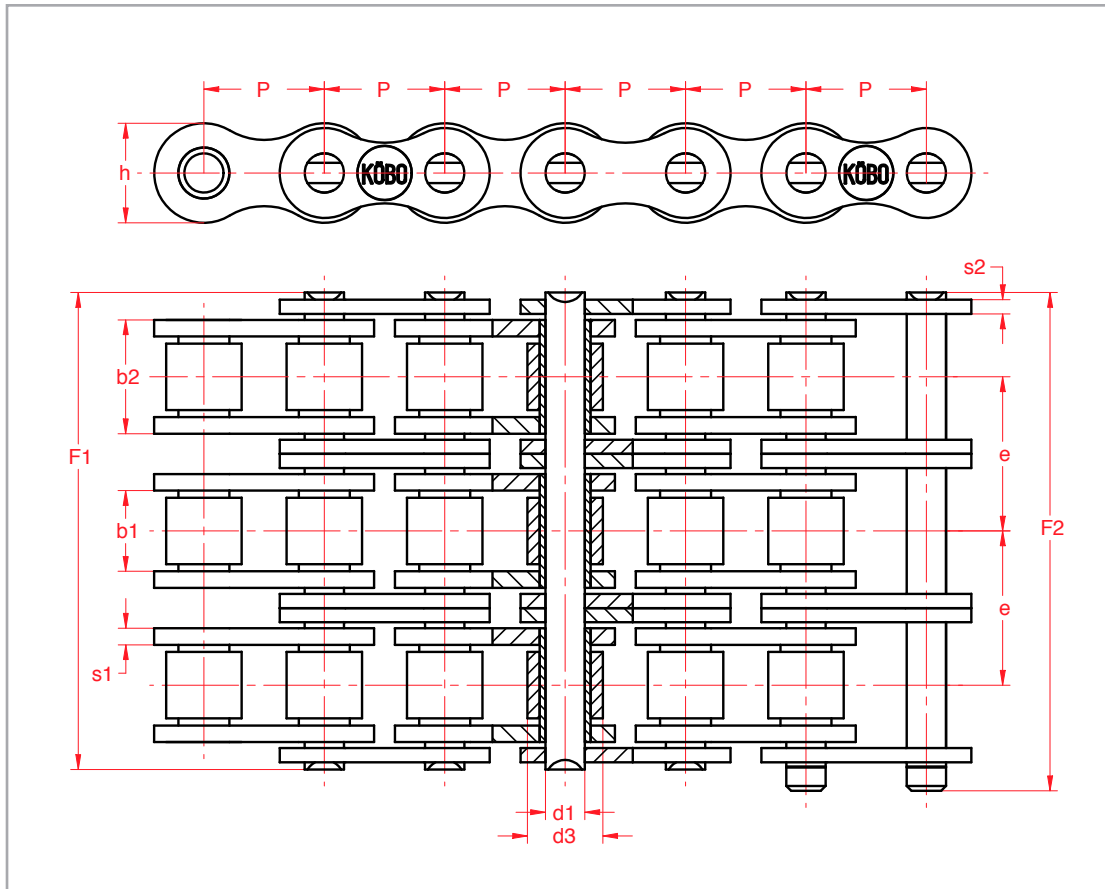

Nr.	Art.Nr.	inch	p mm	b <sub>1</sub> mm min.	b <sub>2</sub> mm max.	d <sub>1</sub> mm h <sub>g</sub>	d <sub>3</sub> mm max.	F <sub>1</sub> mm	F <sub>2</sub> mm	h mm max.	s <sub>1</sub> mm	s <sub>2</sub> mm	e mm	f cm <sup>2</sup>	F <sub>B</sub> N min.	q kg/m
06B-3	13201000	3/8"	9,525	5,72	8,53	3,28	6,35	32,7	34,8	8,2	1,3	1,3	10,24	0,84	27000	1,2
08B-3	13261000	1/2"x1/8"	12,7	7,75	11,30	4,45	8,51	44,9	46,6	11,8	1,6	1,6	13,92	1,51	52700	2,0
10B-3	13331000	5/8"	15,875	9,65	13,28	5,08	10,16	52,4	53,9	14,7	1,6	1,6	16,59	2,02	65300	2,8
12B-3	13391000	1/2"	19,05	11,68	15,62	5,72	12,06	61,1	63,2	16,1	1,8	1,8	19,46	2,68	84100	3,8
16B-3	13451000	1"	25,4	17,02	25,40	8,28	15,88	99,6	104,1	21,0	4,0	3,0	31,88	6,31	207500	8,0
20B-3	12561999	1 1/4"	31,75	19,56	29,01	10,19	19,05	113,6	119,1	26,4	4,5	3,5	36,45	8,87	290000	11
24B-3	13701000	1 1/2"	38,1	25,40	37,90	14,63	25,40	150,2	157,1	33,4	5,5	5,0	48,36	16,63	522000	21
28B-3	13791000	1 3/4"	44,45	30,99	46,50	15,90	27,94	183,5	191,2	37,0	7,0	6,0	59,56	22,18	660000	25
32B-3	13861000	2"	50,8	30,99	45,50	17,81	29,21	181,7	191,1	42,2	7,0	6,0	58,55	24,31	784000	32
40B-3	13901000	2 1/2"	63,5	38,10	55,70	22,89	39,37	223,6	232,1	52,9	8,0	8,0	72,29	38,25	1116000	48
48B-3	13971000	3"	76,2	45,72	70,50	29,24	48,26	281,6	290,3	63,8	12,0	10,0	91,21	61,84	1720000	75
56B-3	13921000	3 1/2"	88,9	53,34	81,30	34,32	53,98	331,0	394,0	77,8	13,0	12,0	106,60	83,71	2460000	105
64B-3	13951000	4"	101,6	60,96	92,00	39,40	63,50	370,0	382,0	90,1	14,0	13,0	119,89	108,74	3250000	180
72B-3	13981000	4 1/2"	114,3	68,58	103,80	44,50	72,39	420,0	446,0	103,6	17,0	15,0	136,27	138,57	3990000	240