


Lange bevestigingslippen

Voor ketting DIN 8187

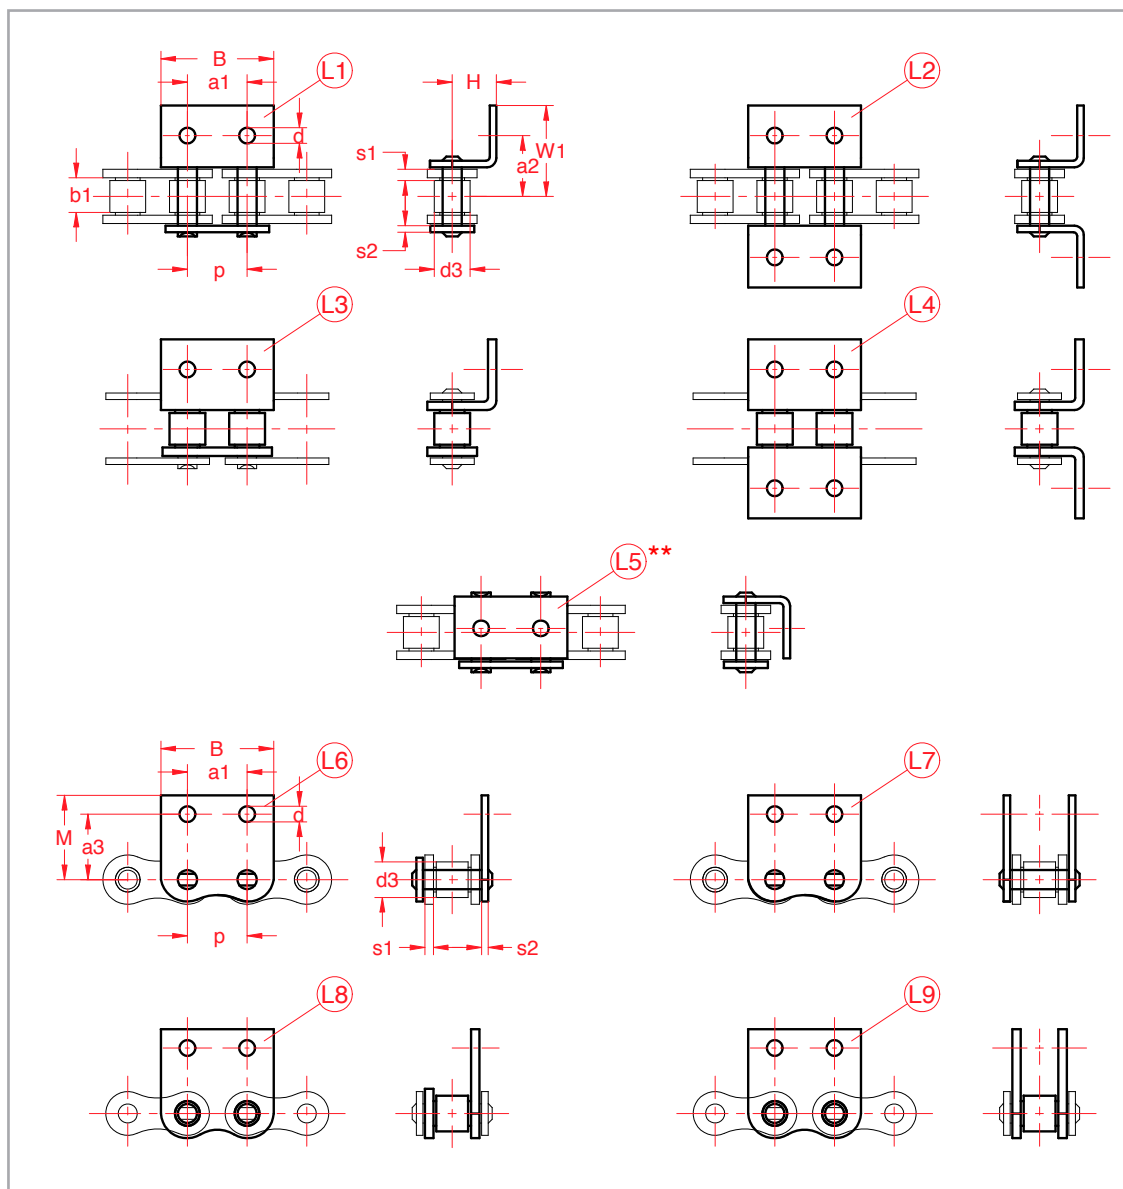

Nr.	p mm	b ₁ mm min.	d ₃ mm max.	a ₁ mm	a ₃ mm	B mm max.	M mm max.	s ₁ mm	s ₂ mm	Volgens fabrieksnorm				Volgens ISO norm (op bestelling)			
										a ₂ * mm	d mm max.	H* mm	W ₁ mm max.	a ₂ * mm	d mm max.	H* mm	W ₁ mm max.
08B	12,7	7,75	8,51	12,7	14,3	24,7	19,2	1,6	1,6	13,0	4,5	9,0	17,9	12,7	4,5	8,9	18,2
10B	15,875	9,65	10,16	15,875	15,5	30,2	24,6	1,6	1,6	15,0	4,5	10,5	22,1	15,9	5,3	10,3	22,3
12B	19,05	11,68	12,06	19,05	20,0	35,6	30,1	1,8	1,8	18,0	6,6	12,0	27,7	19,05	6,6	13,5	26,2
16B	25,4	17,02	15,88	25,4	31,1	47,0	39,1	4,0	3,0	29,0	9,0	18,0	37,8	25,4	6,6	15,9	39,7
20B	31,75	19,56	19,05	31,75	35,0	60,0	45,0	4,5	3,5	34,0	9,6	23,5	44,0	31,75	8,4	19,8	47,8
24B	38,1	25,40	25,40	38,1	45,0	71,6	55,6	5,5	5,0	38,0	10	25,0	59,7	38,1	10,5	26,7	58,0
28B	44,45	30,99	27,94	44,45	55,0	83,0	68,5	7,0	6,0	53,5	12	32,0	73,5	44,45	13,1	28,6	76,0
32B	50,8	30,99	29,21	50,8	63,5	92,0	77,7	7,0	6,0	55,0	14	37,5	75,6	50,8	13,1	31,8	81,3
40B	63,5	38,10	39,37	63,5	65,0	117,0	86,0	8,0	8,0	63,5	17	40,0	90,0	-	-	-	-
48B	76,2	45,72	48,26	76,2	68,0	140,0	95,0	12,0	10,0	76,2	17	50,0	105,0	-	-	-	-

* Niet aan toleranties gebonden

** Gat niet exact boven hart-ketting

De lippen als buitenschakels zijn ook leverbaar als sluitschakel.
Het verdient aanbeveling om slechts sporadisch hiervan gebruik te maken.
Wij geven u graag advies over een gemonteerde lippenketting.