


Simplex TQL (Endurance) rollenketting

TQL® DIN 8187 (Onderhoudsvrije voorgesmeerde ketting)

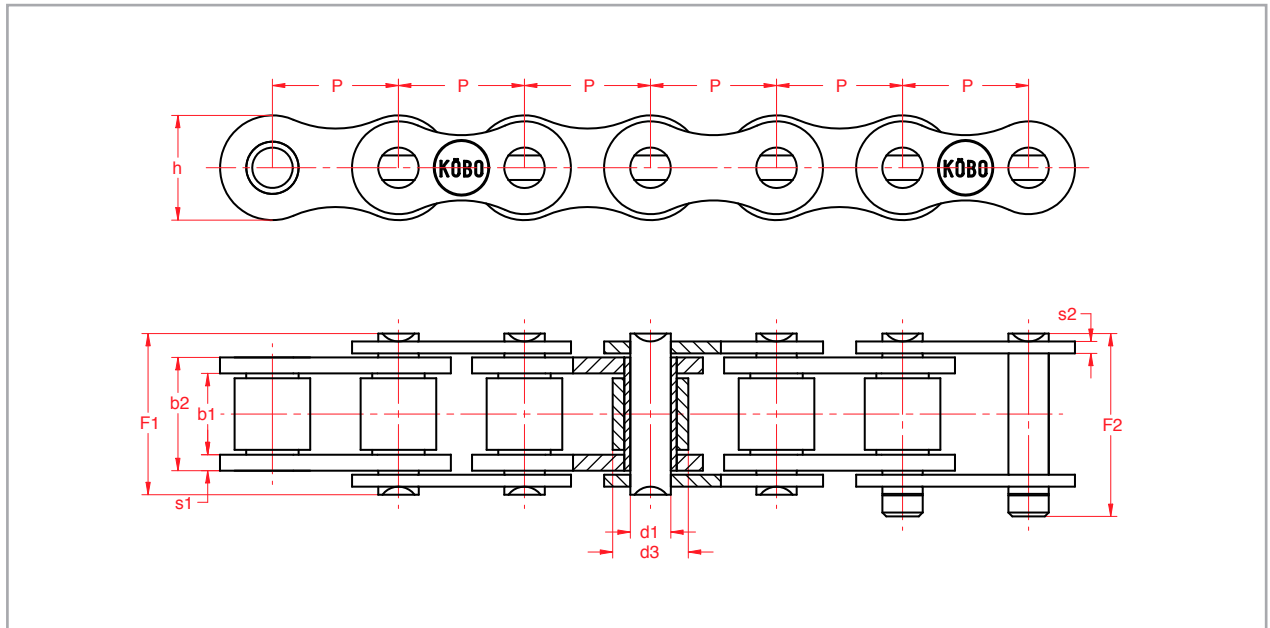

TQL

Nr.	inch	p mm	b ₁ mm min.	b ₂ mm max.	d ₃ mm max.	d ₁ mm	h mm max.	F ₁ mm	f cm ²	F _B N min.	q kg/m
06B-1 TQL	3/8"	9,525	5,72	8,53	6,35	3,28	8,2	13,5	0,28	9600	0,41
08B-1 TQL	1/2"	12,7	7,75	11,3	8,51	4,45	11,8	17	0,5	18600	0,7
10B-1 TQL	5/8"	18,875	9,65	13,28	10,16	5,08	14,7	19,6	0,67	27000	0,91
12B-1 TQL	3/4"	19,05	11,68	15,62	12,07	5,72	16,1	22,7	0,89	31000	1,18
16B-1 TQL	1"	25,4	17,02	25,4	15,88	8,28	21	36,1	2,1	72000	2,68
20B-1 TQL	1 1/4"	31,75	19,56	29	19,05	10,19	26,4	43,2	2,96	105000	3,5
24B-1 TQL	1 1/2"	38,1	25,4	37,9	25,4	14,63	33,4	53,4	5,54	180000	6,8

TQL-RVS

Nr.	inch	p mm	b ₁ mm min.	b ₂ mm max.	d ₃ mm max.	d ₁ mm	h mm max.	F ₁ mm	F ₂ mm	f cm ²	F _B N min.	q kg/m
08B-1	1/2"	12,7	7,75	11,30	11,43	4,45	11,8	17,0	20,9	0,50	12000	0,70
10B-1	5/8"	15,875	9,65	13,28	13,41	5,08	14,7	19,6	23,7	0,67	14500	0,91
12B-1	3/4"	19,05	11,68	15,62	15,75	5,72	16,1	22,7	27,3	0,89	18500	1,18
16B-1	1"	25,4	17,02	25,40	25,60	8,28	21,0	36,1	41,5	2,10	40000	2,50