


Duplex TQL (Endurance) rollenketting

TQL® DIN 8187 (Onderhoudsvrije voorgesmeerde ketting)

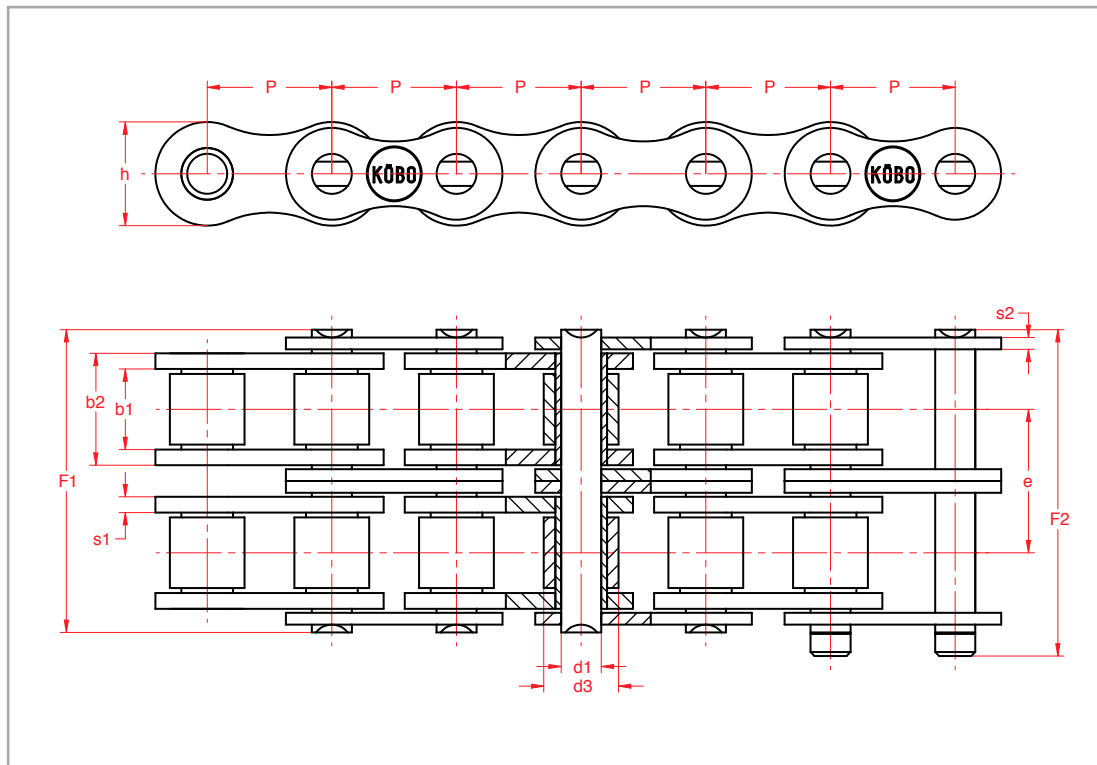

TQL

Nr.	Inch	p mm	b ₁ mm min.	b ₂ mm max.	d ₃ mm max.	d ₁ mm	e mm	h mm max.	F ₁ mm	f cm ²	F _B N min.	q kg/m
06B-2 TQL	3/8"	9,525	5,72	8,53	6,35	3,28	10,24	8,2	23,8	0,56	17400	0,78
08B-2 TQL	1/2"	12,7	7,75	11,3	8,51	4,45	13,92	11,8	31	1,01	37000	1,36
10B-2 TQL	5/8"	18,875	9,65	13,28	10,16	5,08	16,59	14,7	36,2	1,34	54000	1,82
12B-2 TQL	3/4"	19,05	11,68	15,62	12,07	5,72	19,46	16,1	42,2	1,79	63000	2,38
16B-2 TQL	1"	25,4	17,02	25,4	15,88	8,28	31,88	21	68	4,21	140000	5,3
20B-2 TQL	1 1/4"	31,75	19,56	29	19,05	10,19	36,45	26,4	79	5,91	210000	7,3
24B-2 TQL	1 1/2"	38,1	25,4	37,9	25,4	14,63	48,36	33,4	101	11,09	360000	13,4

TQL-RVS

Nr.	Inch	p mm	b ₁ mm min.	b ₂ mm max.	d ₃ mm max.	d ₁ mm	e mm	h mm max.	F ₁ mm	F ₂ mm	f cm ²	F _B N min.	q kg/m
08B-2	1/2"	12,7	7,75	11,30	11,43	4,45	13,92	11,8	31,0	34,9	1,01	20400	1,36
10B-2	5/8"	15,875	9,65	13,28	13,41	5,08	16,59	14,7	36,2	40,3	1,34	24650	1,82
12B-2	3/4"	19,05	11,68	15,62	15,75	5,72	19,46	16,1	42,2	46,8	1,79	31450	2,38
16B-2	1"	25,4	17,02	25,40	25,60	8,28	31,88	21,0	68,0	73,4	4,21	68000	5,10