


# Triplex TQL (Endurance) rollenketting

TQL® DIN 8187 (Onderhoudsvrije voorgesmeerde ketting)

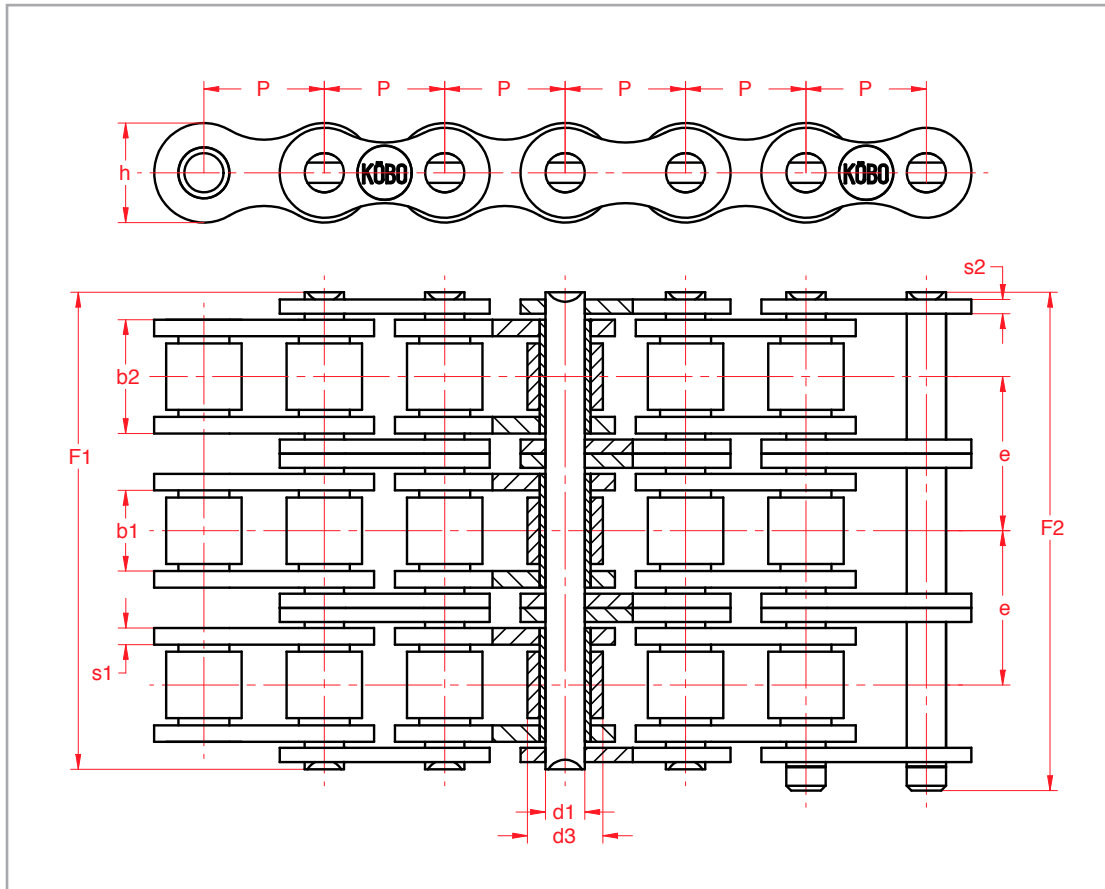

## TQL

Nr.	Inch	p mm	b <sub>1</sub> mm min.	b <sub>2</sub> mm max.	d <sub>3</sub> mm max.	d <sub>1</sub> mm	e mm	h mm max.	F <sub>1</sub> mm	f cm <sup>2</sup>	F <sub>B</sub> N min.	q kg/m
06B-3 TQL	3/8"	9,525	5,72	8,53	6,35	3,28	10,24	8,2	34	0,81	24900	1,18
08B-3 TQL	1/2"	12,7	7,75	11,3	8,51	4,45	13,92	11,8	44,9	1,51	56000	2,01
10B-3 TQL	5/8"	18,875	9,65	13,28	10,16	5,08	16,59	14,7	52,8	2,02	80000	2,7
12B-3 TQL	3/4"	19,05	11,68	15,62	12,07	5,72	19,46	16,1	61,7	2,68	94000	3,12
16B-3 TQL	1"	25,4	17,02	25,4	15,88	8,28	31,88	21	99,9	6,31	211000	7,5
20B-3 TQL	1 1/4"	31,75	19,56	29	19,05	10,19	36,45	26,4	116	8,87	300000	10,6
24B-3 TQL	1 1/2"	38,1	25,4	37,9	25,4	14,63	48,36	33,4	150	16,63	523000	20

## TQL-RVS

Nr.	Inch	p mm	b <sub>1</sub> mm min.	b <sub>2</sub> mm max.	d <sub>3</sub> mm max.	d <sub>1</sub> mm	e mm	h mm max.	F <sub>1</sub> mm	F <sub>2</sub> mm	f cm <sup>2</sup>	F <sub>B</sub> N min.	q kg/m
08B-3	1/2"	12,7	7,75	11,30	11,43	4,45	13,92	11,8	44,9	48,8	1,51	32500	2,01
10B-3	5/8"	15,875	9,65	13,28	13,41	5,08	16,59	14,7	52,8	56,9	2,02	39000	2,70
12B-3	3/4"	19,05	11,68	15,62	15,75	5,72	19,46	16,1	61,7	66,3	2,68	49500	3,12
16B-3	1"	25,4	17,02	25,40	25,60	8,28	31,88	21,0	99,9	105,3	6,31	108000	7,50