


Ketting met kunststofdraagplaten

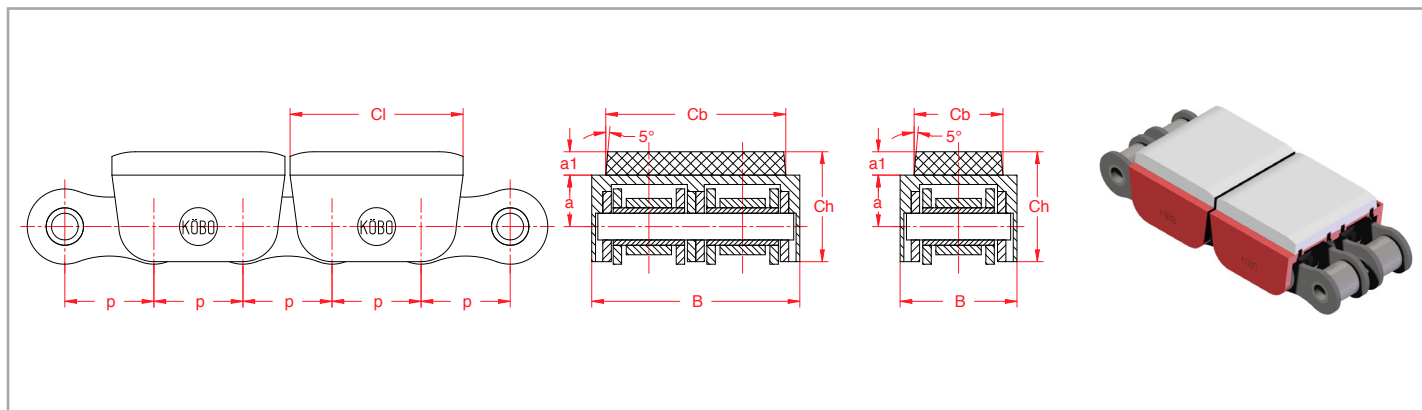


Köbo ketting	Inch	p mm	b ₁ mm	d ₃ mm	a mm	a ₁ mm	B mm	c _b mm	c _h mm	c _l mm
08B-1	1/2"	12,7	7,75	8,51	8,3	4	19,9	14	18	24,2
08B-2	1/2"	12,7	7,75	8,51	8,3	4	33,5	28	18	24,2
10B-1	5/8"	15,875	9,65	10,16	10	5	21,5	15,5	22,35	30,5
10B-2	5/8"	15,875	9,65	10,16	10	5	38,5	32	22,35	30,5
12B-1	3/4"	19,05	11,68	12,06	11	5	25	19	23,5	37
12B-2	3/4"	19,05	11,68	12,06	11	5	44,5	38,5	23,5	37
16B-1	1"	25,4	17,02	15,88	15,4	6	39	33	32	49
16B-2	1"	25,4	17,02	15,88	15,4	6	71	65	32	49

Mat: Köbo precisie rollenketting
 "Click"-bare draagplaten uit rood Acetal
 Wit rubber draagvlak 50-60 Shore max. 80°C

Rollendraagketting

Volgens KÖBO fabrieksnorm

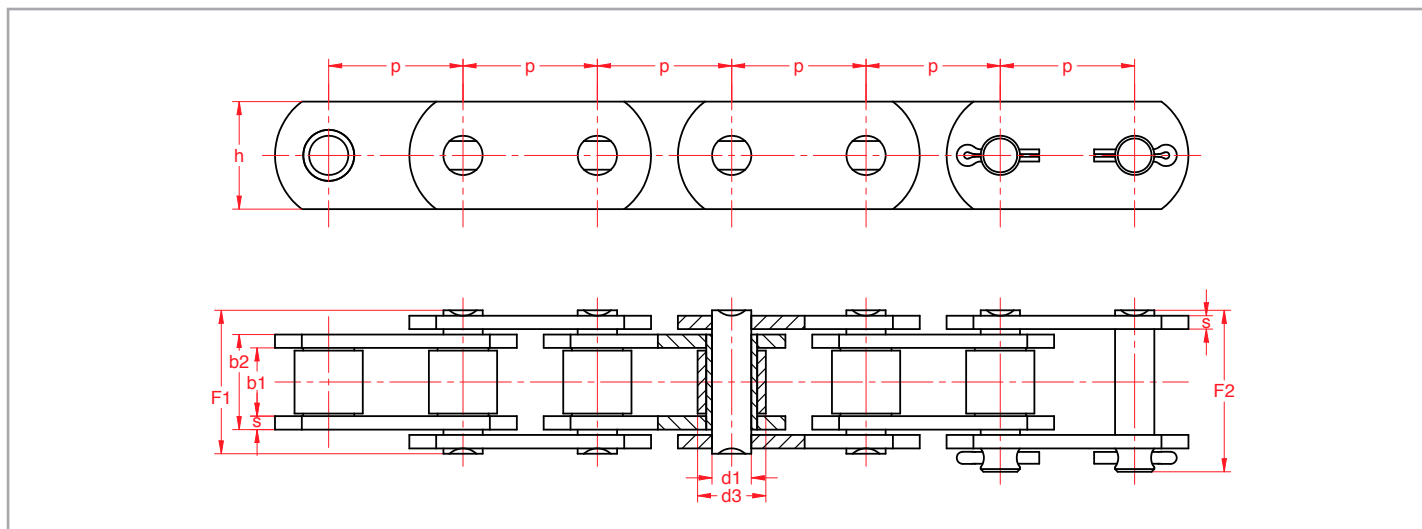

Art.Nr.	p mm	b ₁ mm	b ₂ mm	d ₁ mm	d ₃ mm	F ₁ mm	F ₂ mm	h mm	s ₁ mm	f cm ²	F _B N	q kg/m
14719000	50	25,4	37,92	14,63	25,4	53,4	60,1	40	5	5,56	120000	7,93
14719100+	50	25,4	37,92	14,63	25,4	53,4	60,1	40	5	5,56	120000	7,93
14719200++	50	25,4	37,92	14,63	25,4	53,4	60,1	40	5	5,56	120000	7,93
14729000	100	25,4	37,92	14,63	25,4	53,4	60,1	40	5	5,56	120000	5,41

+ vertande bovenzijde

++ halfronde schakelplaatenden