



- Kettingwielen met voorboring, spiebaan, tapgaten en tapbouten

- Volgens DIN 8187

- 08B-1 - 1/2" x 5/16"

- Materiaal: C45

- Geharde tanden

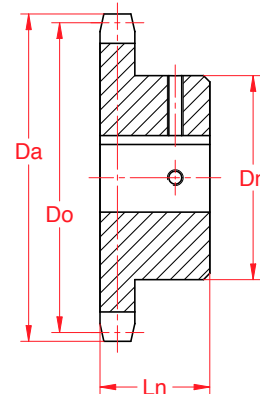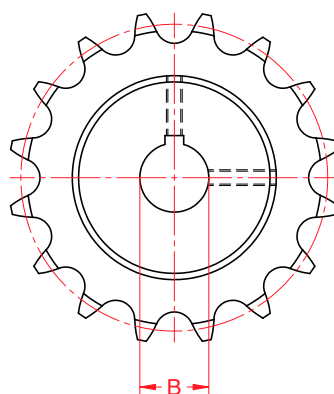

Z	B	D _n	L _n	D _o	D _a
mm	mm	mm	mm	mm	mm
10	12	26	25	41,1	45,9
11	12 15	29	25	45,07	49,9
12	12 15 16 19 20	33	28	49,07	53,9
13	12 15 16 19 20	37	28	53,06	57,9
14	12 15 16 19 20 25	33	28	57,07	61,9
15	12 15 16 19 20 25	33	28	61,09	65,9
16	15 16 19 20 25 28 30	50	28	65,1	69,9
17	15 18 19 20 25 28 30	52	28	69,11	74

Z	B	D _n	L _n	D _o	D _a
mm	mm	mm	mm	mm	mm
18	16 19 20 25 28 30 35	56	28	73,14	78
19	16 19 20 25 28 30 35 38	60	28	77,16	82
20	16 19 20 25 28 30 35 38	64	28	81,19	86
21	16 19 20 25 28 30 35 38	68	28	85,22	90,1
22	16 19 20 25 28 30 35 38	70	28	89,24	94,1

Z	B	D _n	L _n	D _o	D _a
mm	mm	mm	mm	mm	mm
23	19 20 25 28 30 35 38	70	28	93,27	98,1
24	19 20 25 28 30 35 38	70	28	97,29	102,1
25	19 20 25 28 30 38	70	28	101,33	106,2
30	25 28 30 35 38	80	30	121,5	126,3
38	25 28 30 35 38 40 45 50	90	35	153,8	158,6

B	tap-	b	T ₂	B	tap-	b	T ₂
mm	gat	mm	mm	mm	gat	mm	mm
Ø 10	H7	M4	3	Ø 28	H7	M6	8
Ø 12	H7	M4	4	Ø 30	H7	M6	8
Ø 15	H7	M4	5	Ø 35	H7	M8	10
Ø 16	H7	M4	5	Ø 38	H7	M8	10
Ø 19	H7	M5	6	Ø 40	H7	M10	12
Ø 20	H7	M5	6	Ø 45	H7	M12	14
Ø 25	H7	M6	8	Ø 50	H7	M12	14

