


Transportketting

Uitgevoerd als draagketting DIN 8167 MT-serie

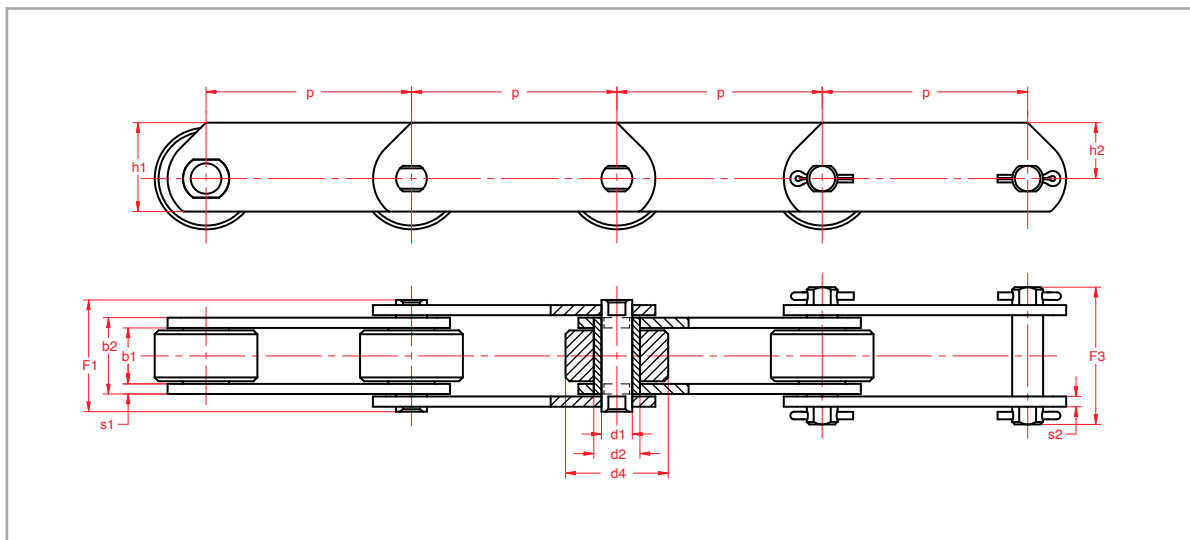

ISO Nr.	P_{Δ} mm	b_1 mm min.	b_2 mm max.	d_1 mm	d_2 mm	d_4 mm	f_1 mm	f_3 mm	h_1 mm	h_2 mm	s mm	f cm ²	F_B N min.
MT 20**	40 50 63 80 100 125 160	16	22	6	9	25	31,2	36,2	25	16	2,5	1,32	20000
MT 28**	50 63 80 100 125 160 200	18	25	7	10	30	35,2	40,2	30	20	3	1,75	28000
MT 40**	63 80 100 125 160 200 250	20	28	8,5	12,5	36	40,2	47,2	35	22,5	3,5	2,38	40000
MT 56	63 80 100 125 160 200 250	24	33	10	15	42	47,2	56,2	45	30	4	3,30	56000
MT 80	80 100 125 160 200 250 315	28	39	12	18	50	55,2	64,2	50	32,5	5	4,68	80000
MT 112	80 100 125 160 200 250 315 400	32	45	15	21	60	64,2	75,2	60	40	6	6,75	112000

** Deze kleinste kettingen hebben géén zekering tegen verdraaiing in bout en bus
 Andere transportkettingen als draagketting: DIN 8165 blz. 135; DIN 8168 blz. 155
 Voor kettinggewicht DIN 8167 zie blz. 138