


Transportketting

Standaard bevestigingslippen
Kettingen DIN 8167

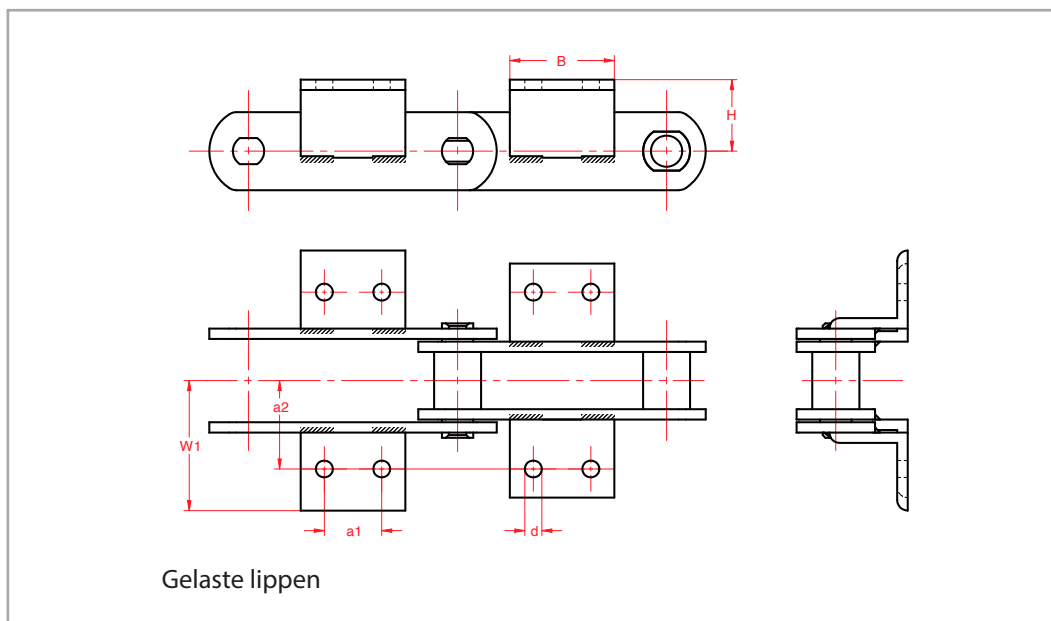

Afmetingen lippenketting standaard

ISO Nr.	P mm	a ₁ mm min.	a ₂ mm max.	B mm max.	d mm max.	H* mm	W ₁ mm max.	hoekijzer	Gewicht kg/st
M 160	100 125 160 200 250 315 400 500	• • 50 85 145 145 145 145	62	30 30 80 115 175 175 175 175	14	45	100	50x 50x 6	0,14 0,14 0,37 0,53 0,80 0,80 0,80 0,80
M 224	125 160 200 250 315 400 500 630	• • 65 125 190 190 190 190	70	35 35 100 160 225 225 225 225	18	55	114	60x 60x 8	0,25 0,25 0,71 1,13 1,60 1,60 1,60 1,60
M 315	160 200 250 315 400 500 630	• 50 100 155 155 155 155	80	35 85 135 190 190 190 190	18	65	125	70x 70x 9	0,27 0,66 1,04 1,46 1,46 1,46 1,46
M 450	200 250 315 400 500 630 800	• 85 455 240 240 240 240	90	40 125 195 280 280 280 280	18	75	140	70x 70x 9	0,37 1,17 1,82 2,62 2,62 2,62 2,62
M 630	250 315 400 500 630 800 1000	• 100 190 300 300 300 300	115	50 150 240 350 350 350 350	24	90	190	100x 100x 12	0,89 2,67 4,27 6,22 6,22 6,22 6,22
M 900	250 315 400 500 630 800 1000	• 65 155 240 240 240 240	140	60 125 215 300 300 300 300	30	110	240	120x 20x 15	1,59 3,32 5,70 7,95 7,95 7,95 7,95

Kettinggewichten

ISO Nr.	0 Kg/m	A Kg/m	B Kg/m	D Kg/m
M 160	9,70 8,85 8,15 7,56 7,22 6,88 6,57 6,36	11,2 10,1 9,12 8,33 7,82 7,38 6,95 8,68	19,5 16,7 14,3 12,5 11,1 9,95 9,00 8,35	20,4 17,5 14,9 13,0 11,5 10,3 9,25 8,52
M 224	13,1 11,9 11,1 10,3 9,78 9,30 8,97 8,67	14,9 13,3 12,2 11,2 10,5 9,86 9,40 9,02	26,2 22,4 19,5 17,1 15,1 13,5 12,3 11,3	27,8 23,4 20,3 17,7 15,7 13,9 12,6 11,6
M 315	18,3 16,7 15,6 14,6 13,9 13,3 12,8	20,5 18,6 17,1 15,8 14,8 14,1 13,4	39,4 29,6 25,9 22,9 20,3 18,5 16,9	36,1 31,0 27,1 23,7 21,2 19,1 17,4
M 450	24,2 22,4 20,9 19,7 18,7 18,0 17,4	27,5 25,0 22,9 21,3 20,1 19,0 18,2	46,0 39,8 34,7 30,6 27,5 24,9 22,8	47,8 41,4 36,0 31,5 28,2 25,5 23,3
M 630	34,8 32,2 30,3 28,4 27,1 26,0 25,2	39,6 35,4 32,7 30,4 28,7 27,2 26,2	62,8 54,3 47,8 42,4 38,3 34,7 32,2	65,7 56,5 49,5 43,8 39,3 35,6 32,9
M 900	51,2 47,0 43,5 40,8 38,8 36,9 35,5	58,0 52,3 47,7 44,2 41,4 39,0 37,2	100 85,7 74,0 65,3 58,1 52,2 47,7	106 90,2 77,4 68,1 60,4 51,7 49,1

* Niet aan toleranties gebonden • = 1 bev. gat

Andere transportkettingen met bevestigingslippen: DIN 8167 blz. 137; DIN 8168 blz. 155