


Gall'se ketting

DIN 8150 fabrieksnorm

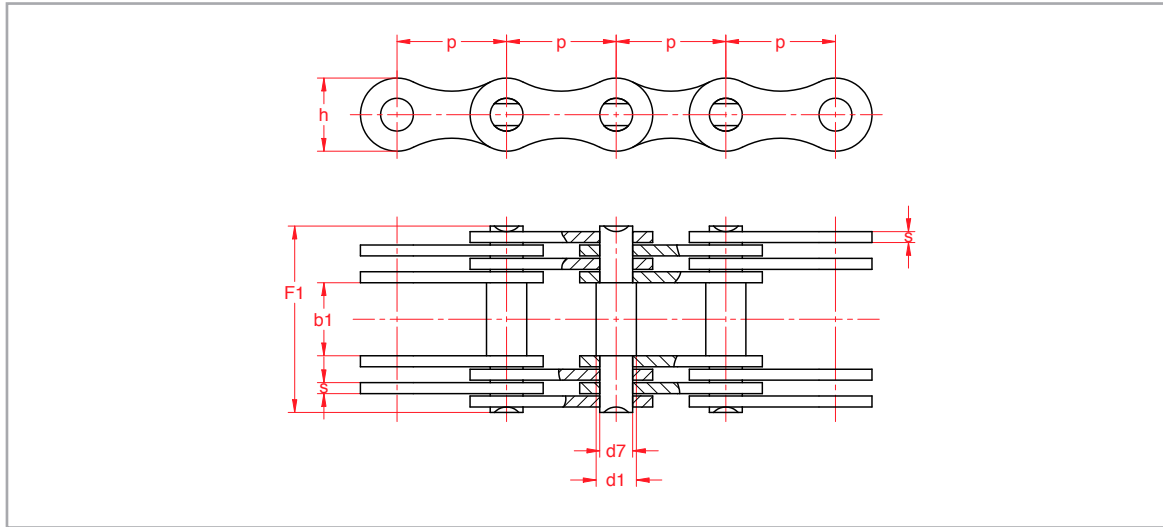

Art.Nr.	p mm	p ₁ mm	b ₁ mm	d ₁ mm	d ₇ mm	D mm	e ₁ mm	F ₁ mm	F ₃ mm	F ₄ mm	h mm	h ₁ mm	L _a mm	L _i mm	s mm	x	f cm ²	F _B N	q kg/m
-	6	-	4	3	2,3	-	-	11	12	-	5	-	-	-	1	2	0,05	1250	0,2
-	8	15	6	3,5	2,5	6	-	13	16	-	7	16	17	17	1	2	0,05	1500	0,3
-	10	15	8	4	3	6	-	17	19	-	8	16	22	19	1,5	2	0,09	2500	0,4
-	13	20	10	5	4	8	-	21	22,5	-	10	18	29	25	2	2	0,16	4500	0,6
14500150	15	20	12	5	4	9	2	25	27	-	12	18	33	29	2	2	0,16	5000	0,7
14500200	20	25	15	8	6	10	2	28	33	-	15	20	36	32	2	2	0,24	12500	1
-	20	25	15	8	6	10	2	36	42	63	15	24	41	37	2	4	0,48	15000	2
14500250	25	30	18	10	8	12	2,5	36	42	68	18	25	46	40	3	2	0,48	25000	1,7
-	25	30	18	10	8	12	2,5	47	52	80	18	23,5	54	48	3	4	0,96	35000	2,9
-	30	40	20	11	9	14	3	43	50	80	20	30	48	44	2	4	0,72	37500	2,7
14500300	30	40	20	11	9	14	3	51	58	88	20	30	60	54	3	4	1,08	40000	3,1
14500350	35	45	22	12	10	16	3,5	53	61	93	26	35	62	55	3	4	1,2	60000	4,1
14500400	40	50	25	14	12	18	4	58	66	102	30	40	70	63	3	4	1,44	80000	5
14500450	45	55	30	17	14	22	4,5	63	70	108	35	45	75	68	3	4	1,68	100000	6,2
14500500	50	60	35	22	18	26	5	90	97	141	38	50	108	98	4,5	4	3,24	150000	10,9
14500550	55	65	40	24	21	32	5,5	108	115	163	40	55	132	118	6	4	5,04	200000	14,1
14500600	60	70	45	26	23	36	6	114	120	171	45	60	139	125	6	4	5,52	250000	17,2
-	70	85	50	32	28	40	7	148	157	213	55*	70	169	156	6	6	10,08	375000	33,5
-	80	100	60	36	32	50	8,5	159	171	233	60*	85	189	176	6	6	11,52	500000	38,2
-	90	120	70	40	36	60	10	184	200	266	70*	100	214	199	7	6	15,12	750000	53
-	100	140	80	45	40	70	12	224	234	309	80*	120	256	239	7	8	22,95	1000000	76,6
-	110	160	90	50	45	80	14	236	251	327	90*	140	279	264	7	8	25,28	1250000	90
-	120	180	100	55	50	90	16	262	277	357	100*	160	306	287	8	8	32	1500000	112

* Met rechte schakelplaten

