


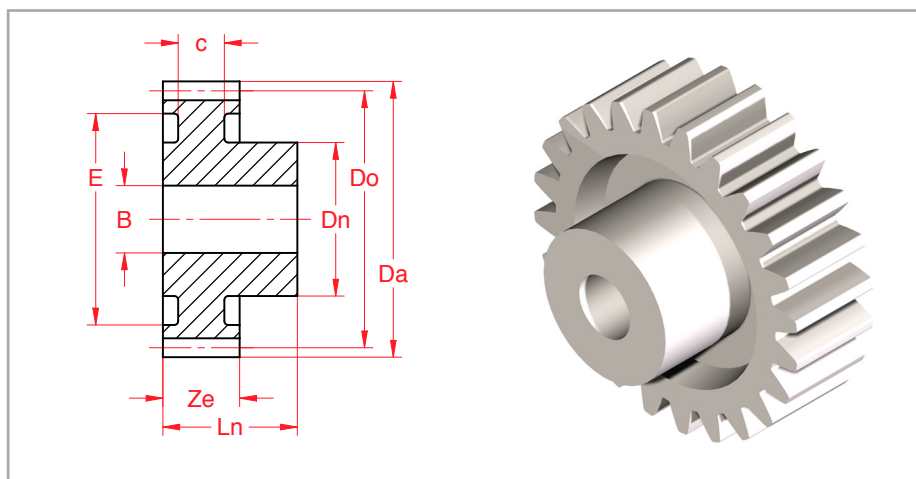

Materiaal: Kunststof (Hostaform C)
 Smitgietwerk
 Boring nabewerkt

Drukhoek: 20°
 Vertandingskwaliteit: 12e28 DIN 3962/63/67

Art.nummer	z	D _o	D _a	D _n	L _n	E	c	Z _e	B
4E100120	12	12	14	9	17	-	-	9	4
4E100130	13	13	15	9	17	-	-	9	4
4E100140	14	14	16	9	17	-	-	9	4
4E100150	15	15	17	9	17	-	-	9	4
4E100160	16	16	18	9	17	-	-	9	4
4E100170	17	17	19	9	17	-	-	9	4
4E100180	18	18	20	9	17	13,5	6	9	4
4E100190	19	19	21	9	17	13,5	6	9	4
4E100200	20	20	22	9	17	13,5	6	9	4
4E100210	21	21	23	12	17	16	6	9	5
4E100220	22	22	24	12	17	16	6	9	5
4E100230	23	23	25	12	17	16	6	9	5
4E100240	24	24	26	15	18	19	6	9	6
4E100250	25	25	27	15	18	19	6	9	6
4E100260	26	26	28	15	18	19	6	9	6
4E100270	27	27	29	15	18	19	6	9	6
4E100280	28	28	30	15	18	22	6	9	6
4E100300	30	30	32	15	18	22	6	9	6
4E100320	32	32	34	18	18	24,5	4,6	9	6
4E100350	35	35	37	18	18	24,5	4,6	9	8
4E100360	36	36	38	18	18	28	4,6	9	8
4E100380	38	38	40	18	18	28	4,6	9	8
4E100400	40	40	42	18	18	28	4,6	9	8
4E100420	42	42	44	18	18	37	4,6	9	8
4E100450	45	45	47	18	18	37	4,6	9	8
4E100480	48	48	50	18	18	37	4,6	9	8
4E100500	50	50	52	18	18	37	4,6	9	8
4E100520	52	52	54	21	18	47	4,6	9	8
4E100540	54	54	56	21	18	47	4,6	9	8
4E100550	55	55	57	21	18	47	4,6	9	8
4E100560	56	56	58	21	18	47	4,6	9	8
4E100600	60	60	62	21	18	47	4,6	9	8
4E100640	64	64	66	21	18	57	4,6	9	10
4E100650	65	65	67	21	18	57	4,6	9	10
4E100700	70	70	72	21	18	57	4,6	9	10
4E100720	72	72	74	21	18	67	4,6	9	10
4E100750	75	75	77	21	18	67	4,6	9	10
4E100800	80	80	82	21	18	67	4,6	9	10
4E100850	85	85	87	21	18	77	4,6	9	10
4E100900	90	90	92	21	18	77	4,6	9	10