


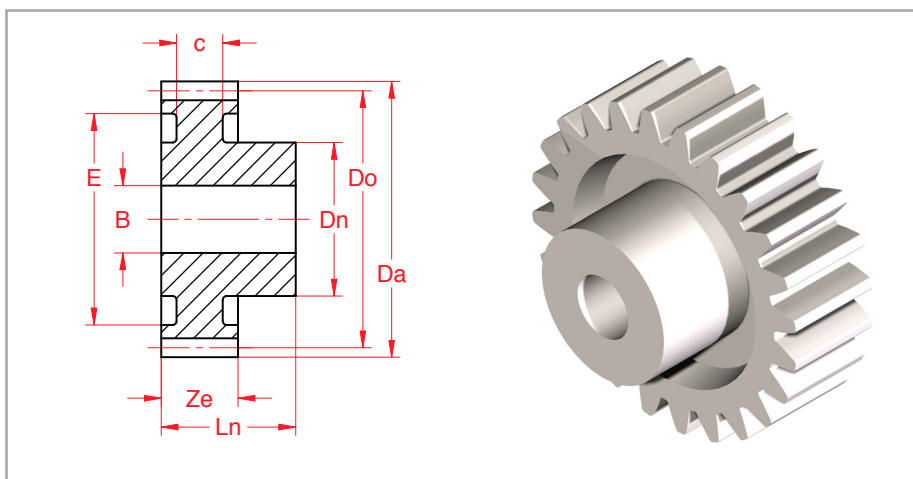

Materiaal: Kunststof (Hostaform C)
Spuitsietwerk
Boring nabewerkt

Drukhoek: 20°
Vertandingskwaliteit: 12e28 DIN 3962/63/67

Art.nummer	z	D _o	D _a	D _n	L _n	E	c	Z _e	B
4E200120	12	24	28	18,5	27	-	-	15	8
4E200130	13	26	30	18,5	27	-	-	15	8
4E200140	14	28	32	18,5	27	-	-	15	8
4E200150	15	30	34	18,5	27	-	-	15	8
4E200160	16	32	36	17,5	27	23	6	15	8
4E200170	17	34	38	17,5	27	25	6	15	8
4E200180	18	36	40	17,5	27	26	6	15	8
4E200190	19	38	42	17,5	27	28	6	15	8
4E200200	20	40	44	20	27	29	6	15	10
4E200210	21	42	46	20	27	29	6	15	10
4E200220	22	44	48	20	27	29	6	15	10
4E200230	23	46	50	20	27	36	6	15	10
4E200240	24	48	52	24	27	36	6	15	10
4E200250	25	50	54	24	27	36	6	15	10
4E200260	26	52	56	24	27	40	6	15	10
4E200270	27	54	58	24	27	40	6	15	10
4E200280	28	56	60	24	27	40	6	15	10
4E200300	30	60	64	24	27	46	6	15	10
4E200320	32	64	68	26	27	46	6	15	10
4E200350	35	70	74	26	27	56	6	15	12
4E200360	36	72	76	26	27	56	6	15	12
4E200380	38	76	80	26	27	64	6	15	12
4E200400	40	80	84	26	27	64	6	15	12
4E200420	42	84	88	26	27	64	6	15	12