


Conische tandwielen

1:1,5 Kwaliteit 8f24

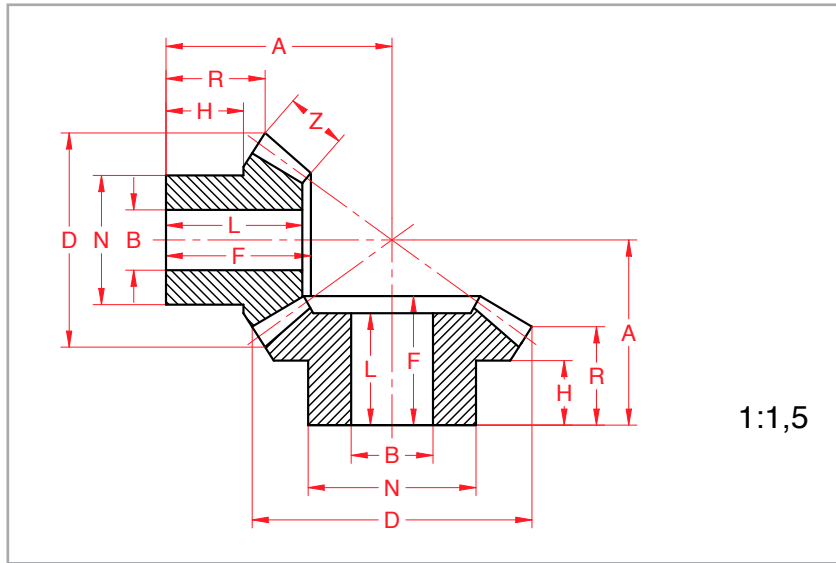

Materiaal: 34Cr4 DIN 1.7033
 * = C45 DIN 1.1191
 Drukhoek: 20°
 Kwaliteit: 8f24

Art.nummer	Grootte	Moduul	z/z	B _(h7)	N	D	L	F	H	R	A	Z
4M151500	0	1,5	16* 24	8 10	18 22	26,5 37,7	17,8 18,5	18,8 20	10 11,5	12,8 16,2	30 27	7,6
4M201500	1	2	16 24	11 13	22 26	35,3 50,2	19,1 18,7	21,1 21,7	10 12	13,1 16,7	36 31	10,1
4M251500	2	2,5	16 24	14 16	28 32	44,1 62,8	21,9 22,6	24,4 26,4	10,5 14	14,4 20,1	43 38	12,6
4M301500	3	3	16 24	17 19	34 38	53 75,3	24,7 26,5	27,7 31	11 16,5	15,7 23,5	50 45	15,1
4M351500	4	3,5	16 24	20 23	40 46	61,8 87,9	28,5 32,4	32 37,7	12,5 20,5	18 28,9	58 54	17,7
4M401500	5	4	16 24	23 26	46 52	70,6 100,4	32,2 36,3	36,2 42,3	14 23	20,2 32,2	66 61	20,2
4M451500	6	4,5	16 24	25 29	50 58	79,4 113	37 40,2	41,5 47	16,5 25	23,5 35,7	75 68	22,7
4M501500	7	5	16 24	28 32	56 64	88,3 125,5	39,8 44,3	44,8 51,8	17,5 28	24,8 39,2	82 75	25,5

Vermogen (kW)

toerental (min⁻¹)

Grootte	100	300	500	700	1000	1500	2000	2500
0	0,036	0,081	0,147	0,165	0,184	0,257	0,353	0,772
1	0,143	0,184	0,294	0,331	0,404	0,588	0,736	0,883
2	0,179	0,294	0,404	0,588	0,772	1,104	1,361	1,700
3	0,210	0,552	0,846	1,067	1,361	1,803	2,208	2,723
4	0,294	0,883	1,214	1,545	2,100	2,796	3,459	
5	0,368	1,067	1,692	2,208	2,980	4,084	5,115	
6	0,441	1,472	2,355	3,128	4,268	5,556		
7	0,662	2,097	3,201	4,195	5,483	7,360		