


# Motoren & reductoren

Type SU

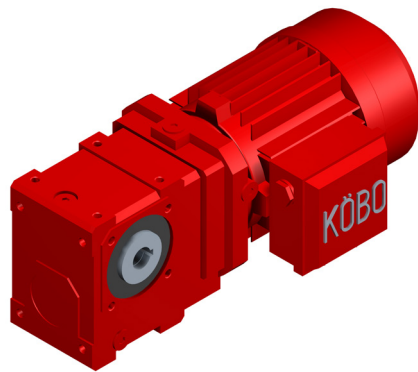

Tandwiel Wormwiel Motorreductoren

- Vermogen: 0,12 - 7,5 kW
- Koppel: 10 - 1400 Nm
- Ratio: 8 - 3400:1
- Haakse opsteek

Type reductorkast	Boring schacht H7 mm	Lengte schacht	Diameter naaf mm	Type reductorkast	Boring schacht H7 mm	Lengte schacht	Diameter naaf mm	
S.. 414A,B,S	*20	100	45	S.. 608A,B	40	144	65	
	25	100	45		*45	144	65	
	30	100	45		S.. 609A,B	*50	154	75
S.. 454A,B,S	20	100	45	S.. 506C	60	154	75	
	25	100	45		30	124	60	
	*30	100	45		35	124	60	
S.. 455A,B,S	25	109	50	S.. 507C	*40	124	60	
	30	109	50		40	124	65	
	*35	109	50		*45	124	65	
S.. 506A,B,S	30	124	60	S.. 608C	40	144	65	
	35	124	60		*45	144	65	
	*40	124	60		S.. 609C	*50	154	75
S.. 507A,B,S	40	124	65	S.. 609C	60	154	75	
	*45	124	65		S.. 608A,B	40	144	65
S.. 414A,B,S	*20	100	45	S.. 609A,B	*45	144	65	
	25	100	45		*50	154	75	
	30	100	45		S.. 506C	60	154	75
S.. 454A,B,S	20	100	45	S.. 506C	30	124	60	
	25	100	45		35	124	60	
	*30	100	45		*40	124	60	
S.. 455A,B,S	25	109	50	S.. 507C	40	124	65	
	30	109	50		*45	124	65	
	*35	109	50		S.. 608C	40	144	65
S.. 506A,B,S	30	124	60	S.. 608C	*45	144	65	
	35	124	60		S.. 609C	*50	154	75
	*40	124	60		60	154	75	
S.. 507A,B,S	40	124	65					
	*45	124	65					

Toelichting:

\* = Standaard

Schacht voorzien van spiebaan