


Triplex rollenketting

DIN 8188 (Amerikaanse norm ANSI)

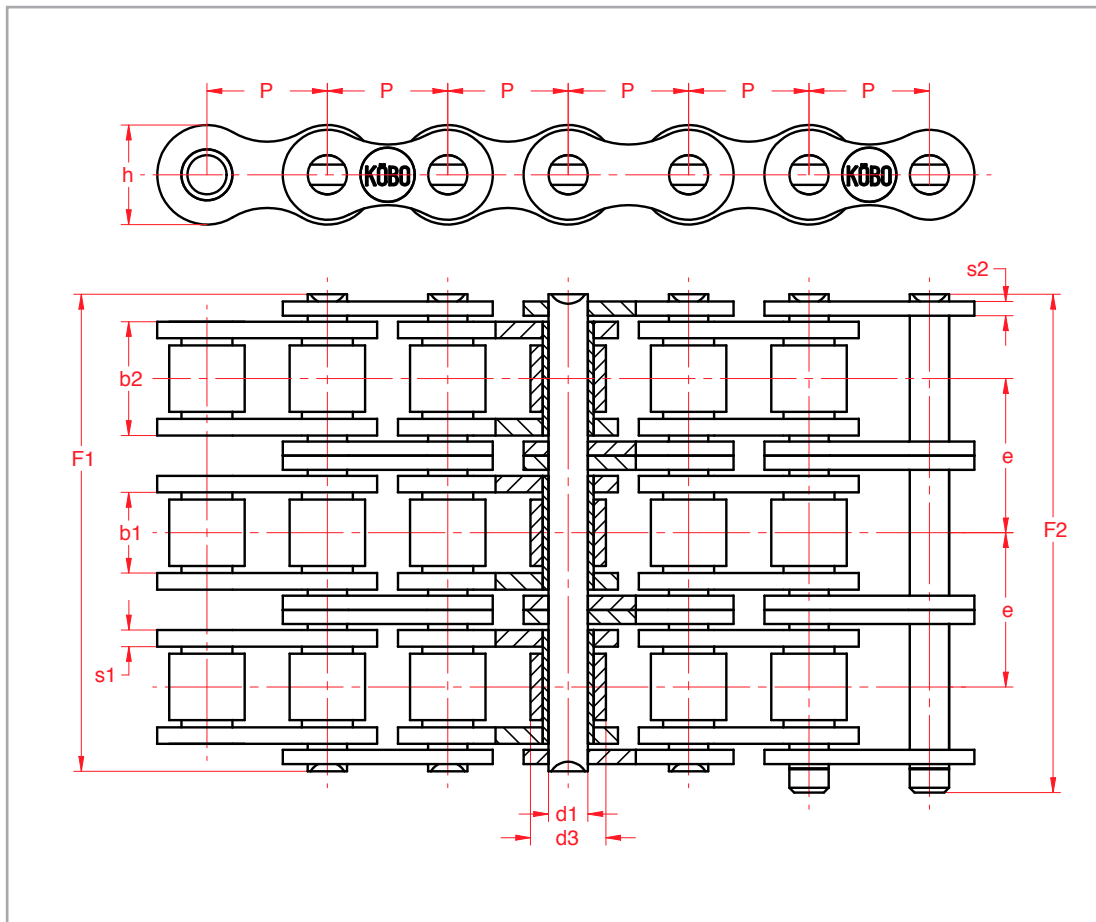

Nr.	ASA Nr.	Art.Nr.	p mm	b ₁ mm min.	b ₂ mm max.	d ₁ mm h _g	d ₃ mm max.	F ₁ mm	F ₂ mm	h mm max.	s ₁ /s ₂ mm	e mm	f cm ²	F _B N min.	q kg/m
06C-3	35-3*	13202000	9,525	4,68	7,47	3,58	5,08*	33,5	36,8	9,0	1,3	10,13	0,80	23700	1,1
08A-3	40-3	13262000	12,7	7,85	11,15	3,96	7,95	46,7	50,6	12,0	1,6	14,38	1,32	42300	1,8
10A-3	50-3	13332000	15,875	9,40	13,80	5,08	10,16	57,9	62,0	15,0	2,0	18,11	2,10	66600	2,9
12A-3	60-3	13392000	19,05	12,57	17,70	5,94	11,91	72,6	77,2	18,0	2,4	22,78	3,15	95400	4,3
16A-3	80-3	13452000	25,4	15,75	22,50	7,92	15,88	91,7	97,1	24,1	3,2	29,29	5,35	170100	7,5
20A-3	100-3	13562000	31,75	18,90	27,40	9,53	19,05	113	119,1	30,1	4,2	35,76	7,83	265500	11,0
24A-3	120-3	13702000	38,1	25,22	35,30	11,10	22,23	141	147,6	36,2	5,0	45,44	11,76	381000	16,5
28A-3	140-3	13792000	44,45	25,22	37,00	12,70	25,40	152	159,4	42,2	5,5	48,87	14,10	517200	21,7
32A-3	160-3	13862000	50,8	31,55	45,00	14,27	28,58	182	189,9	48,2	6,3	58,55	19,26	680400	28,3
40A-3	200-3	13902000	63,5	37,85	54,70	19,84	39,68	223	233,0	60,3	8,0	71,55	32,56	1061400	48,0
48A-3	240-3	13972000	76,2	47,35	67,50	23,80	47,63	271	281,0	72,3	10	87,83	48,20	1530900	66,0

* Bussenketting zonder rollen

Kettingwielen op aanvraag