


# Simplex rollenketting

In speciale uitvoering

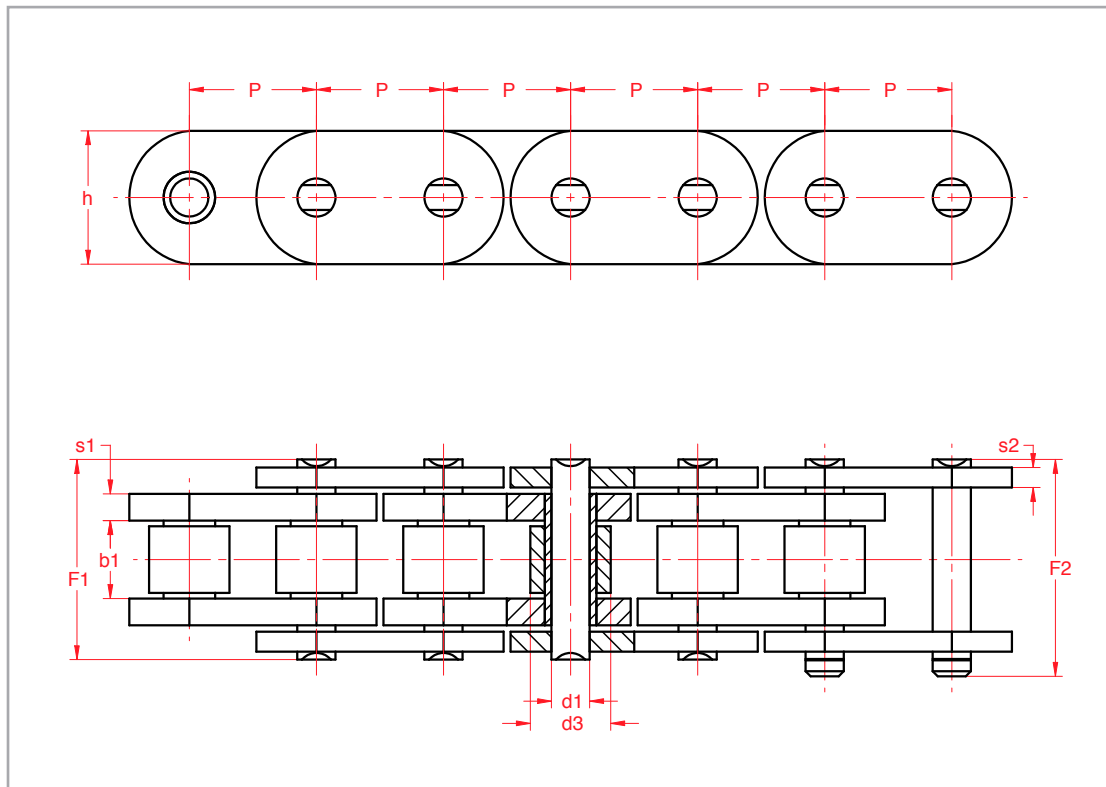

Nr.	Art.Nr.	inch	p mm	b <sub>1</sub> mm min.	b <sub>2</sub> mm max.	d <sub>1</sub> mm h <sub>g</sub>	d <sub>3</sub> mm max.	F <sub>1</sub> mm	F <sub>2</sub> mm	h mm max.	s <sub>1</sub> mm	s <sub>2</sub> mm	f cm <sup>2</sup>	F <sub>B</sub> N min.	q kg/m
Ketting met rechte schakelplaten															
10B-1	11336000	5/8"	15,875	9,65	13,28	5,08	10,16	19,1	21,5	14,7	1,6	1,6	0,67	22500	0,95
12B-1	11396500	1/2"	19,05	11,68	15,62	5,72	12,06	22,3	25,1	16,1	1,8	1,8	0,89	30500	1,25
16B-1	11456500	1"	25,4	17,02	25,40	8,28	15,88	35,8	40,1	21,0	4,0	3,0	2,10	71500	2,70
20B-1	11566000	1 1/4"	31,75	19,56	29,01	10,19	19,05	40,6	46,1	26,4	4,5	3,5	2,96	100000	3,60
24B-1	11706000	1 1/2"	38,1	25,40	37,90	14,63	25,40	53,4	60,1	33,4	5,5	5,0	5,54	180000	6,70

Verzwaarde schakelplaten, speciaal ontwikkeld voor gebruik in de cement- en/of steendindustrie

12A-1	11394800	1/2"	19,05	12,57		5,94	11,91	30		20	4	3		40000	
12B-1	11394700	1/2"	19,05	11,68		5,72	12,06	30		20	4	3		40000	

RVS ketting met rechterplaat

16B-1	LH11455600	1"	25,4	17,02	25,40	8,28	15,88	35,8	40,1	21,0	4,0	3,0	2,10	50050	2,70
-------	------------	----	------	-------	-------	------	-------	------	------	------	-----	-----	------	-------	------