


Duplex rollenketting

DIN 8188 (Amerikaanse norm ANSI)

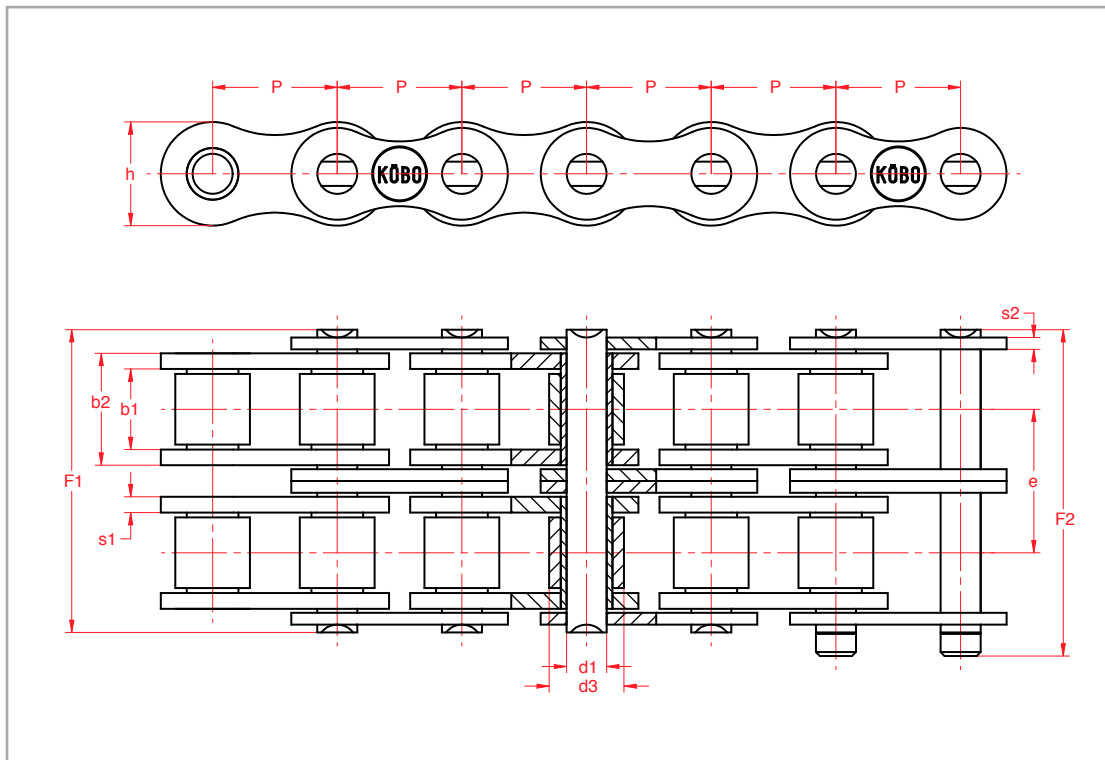

Nr.	ASA Nr.	Art.Nr.	p mm	b ₁ mm min.	b ₂ mm max.	d ₁ mm h _g	d ₃ mm max.	F ₁ mm	F ₂ mm	h mm max.	s ₁ /s ₂ mm	e mm	f cm ²	F _B N min.	q kg/m
06C-2	35-2*	12202000	9,525	4,68	7,47	3,58	5,08*	23,4	26,7	9,0	1,3	10,13	0,53	15800	0,7
08A-2	40-2	12262000	12,7	7,85	11,15	3,96	7,95	32,2	36,2	12,0	1,6	14,38	0,88	28200	1,2
10A-2	50-2	12332000	15,875	9,40	13,80	5,08	10,16	39,9	44,0	15,0	2,0	18,11	1,40	44400	1,9
12A-2	60-2	12392000	19,05	12,57	17,70	5,94	11,91	49,8	54,4	18,0	2,4	22,78	2,10	63600	2,9
16A-2	80-2	12452000	25,4	15,75	22,50	7,92	15,88	62,7	68,1	24,1	3,2	29,29	3,56	113400	5,0
20A-2	100-2	12562000	31,75	18,90	27,40	9,53	19,05	77,0	83,1	30,1	4,2	35,76	5,22	177000	7,3
24A-2	120-2	12702000	38,1	25,22	35,30	11,10	22,23	96,3	102,9	36,2	5,0	45,44	7,84	254000	10,9
28A-2	140-2	12792000	44,45	25,22	37,00	12,70	25,40	103	110,4	42,2	5,5	48,87	9,40	344800	14,4
32A-2	160-2	12862000	50,8	31,55	45,00	14,27	28,58	124	131,9	48,2	6,3	58,55	12,80	453600	19,1
40A-2	200-2	12902000	63,5	37,85	54,70	19,84	39,68	151	161,0	60,3	8,0	71,55	21,70	707600	32,0
48A-2	240-2	12972000	76,2	47,35	67,50	23,80	47,63	183	193,0	72,3	10	87,83	32,10	1020600	44,0

* Bussenketting zonder rollen

Kettingwielen op aanvraag