




Klembus kettingwielen

16B-1/2/3

1" x 17,02

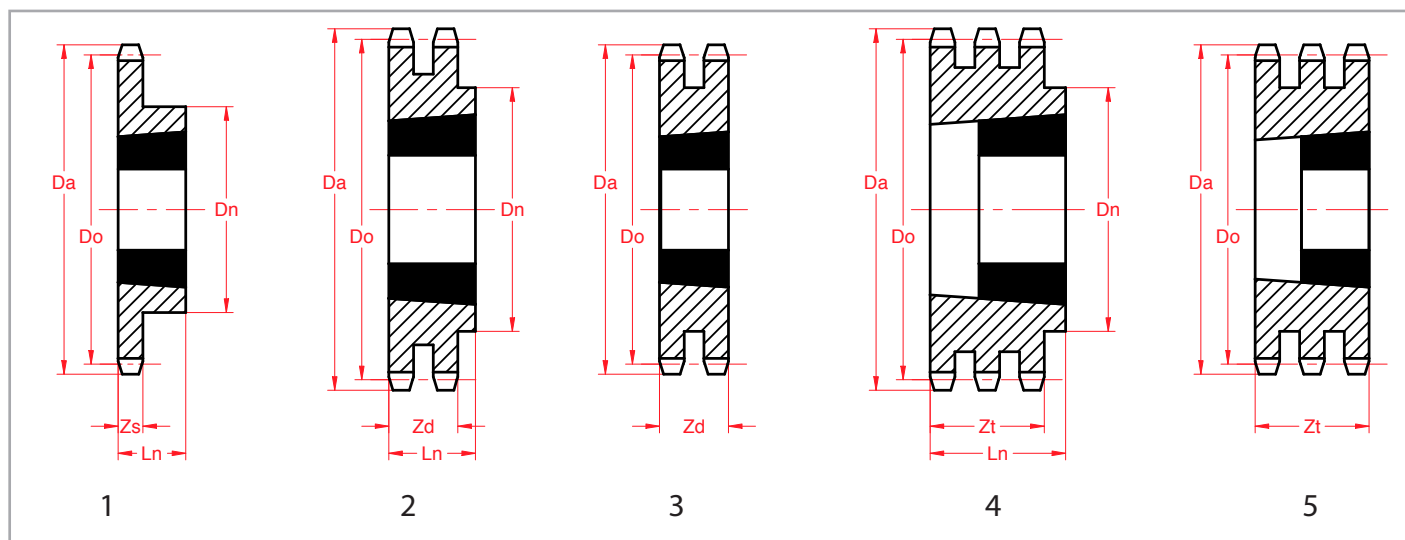

Z	D _o	D _a	Simplex z _s = 16,2				Duplex z _d = 47,7				Triplex z _t = 79,6			
			D _n	L _n	uitv.	bus	D _n	L _n	uitv.	bus	D _n	L _n	uitv.	bus
13	106,13	117,7	73	38	1	1615	-	-	-	-	-	-	-	
15	122,16	133,7	76	38	1	1615	-	47,7	3	2012	-	-	-	
17	138,23	149,8	90	32	1	2012	-	47,7	3	2517	-	79,6	5	
19	154,31	165,9	108	44	1	2517	-	47,7	3	2517	-	79,6	5	
21	170,42	182,0	110	44	1	2517	140	51	2	3020	-	79,6	5	
23	186,53	198,1	110	44	1	2517	140	51	2	3020	159	89	4	
25	202,65	214,2	110	44	1	2517	140	51	2	3020	175	89	4	
27	218,79	230,4	110	44	1	2517	140	51	2	3020	175	89	4	
30	242,99	254,6	120	44	1	2517	140	76	2	3030	175	89	4	



Klembus nr.	Art.Nr. ...= boring	verkrijgbare boringen (mm)	Klembus lengte (mm)	Gewicht bij d _{min} (kg)
1008	56801...	10 11 12 14 16 18 19 20 22 24 25	22,3	0,12
1108	56802...	10 11 12 14 16 18 19 20 22 24 25 28	22,3	0,16
1210	56803...	11 12 14 16 18 19 20 22 24 25 28 30 32	25,4	0,28
1215	56815...	11 12 14 16 18 19 20 22 24 25 28 30 32	38,1	0,35
1310	56804...	14 16 18 19 20 22 24 25 28 30 32 35	25,4	0,32
1610	56805...	14 16 18 19 20 22 24 25 28 30 32 35 38 40 42	25,4	0,41
1615	56806...	14 16 18 19 20 22 24 25 28 30 32 35 38 40 42	38,1	0,60
2012	56807...	14 16 18 19 20 22 24 25 28 30 32 35 38 40 42 45 48 50	31,8	0,75
2517	56808...	16 18 19 20 22 24 25 28 30 32 35 38 40 42 45 47 50 55 60	44,5	1,06
3020	56809...	25 28 30 32 35 38 40 42 45 47 50 55 60 65 70 75	50,8	2,50
3030	56810...	35 38 40 42 45 47 50 55 60 65 70 75	76,2	3,75
3525	56816...	35 38 40 42 45 47 50 55 60 65 70 75 80 85 90	88,9	6,65
3535	56811...	35 38 40 42 45 47 50 55 60 65 70 75 80 85 90	88,9	5,13
4030	56817...	40 42 45 47 50 55 60 65 70 75 80 85 90 95 100	76,2	7,56
4040	56812...	40 42 45 47 50 55 60 65 70 75 80 85 90 95 100 105 110 115	101,6	7,68
4545	56813...	55 60 65 70 75 80 85 90 95 100 105 110 115 120 125	114,3	12,70
5050	56814...	70 75 80 85 90 95 100 105 110 115 120 125	127,0	15,17

Uitgevoerd met vlakke spie

Klembussen kunnen ook met inch boringen worden geleverd.

